
# CJ-SERIES PNEUMATIC FEMALE THREADED PLUG



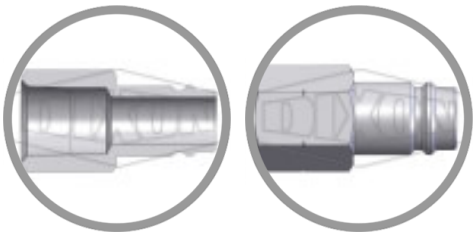

** Referential image*
*** Some features may vary without prior notice. Sale subject to inventory availability*

DATE
: 11/23/2026 07:04 PM

SKU
: 10113

BRAND
: DIXON VALVE

MODEL
: CJ3BF3

Specifications:
Rated pressure for connected Brass Coupler & Steel Plug: 300 PSI (20 bar) Maximum Working and 8,000 PSI (552 bar) Burst

Construction:
Machined components are manufactured using solid steel bar stock.
Steel componentry is plated using ROHS Compliant Trivalent Chrome.

Compatibility & Interchange Data:
European High-Flow Interchange
Interchanges with Rectus 27KA, CEJN 410 and other like designs

Safety notes:
It is important to be safe when installing quick disconnect couplings into a pneumatic circuit. Never install a pneumatic coupling directly into an air tool, use a piece of hose that is at least 18" long, between the tool and the coupling, to prevent damage to the coupling. To protect the operator, safety devices, such as a safety check valve and safety cable should be installed in case there is a hose or coupling failure.
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov



2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| **Body Size** | 3/8" |
| **Factory Part Number** | CJ3BF3 |
| **Hex** | 7/8" |
| **Length** | 1.50" (38.0mm) |
| **Material** | Steel |
| **Maximum OD** | 1.01" (25.7mm) |
| **Pressure Rating** | See Product Details |
| **Temperature Range** | -40°F to +250°F (-40°C to +121°C) |
| **Thread** | BSPP |
| **Thread Size** | 3/8" |
| **Weight Lb** | 0.1500 |



KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU

sales@kmxusa.us

www.kmxusa.us