
SPRING CHECK TYPE SNOOT MALE OUTLET

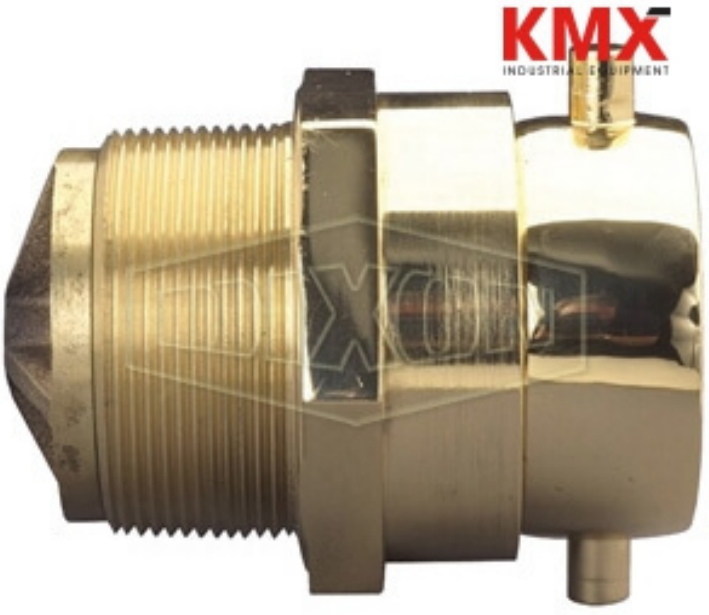

** Referential image*
*** Some features may vary without prior notice. Sale subject to inventory availability*

DATE
: 11/24/2026 09:21 PM

SKU
: 10325

BRAND
: DIXON VALVE

MODEL
: CSSTM30F30T-C

Use:
Used when a direct connection to bodies is desired

Available Options:
Other configurations are also available. Consult Dixon® for information.

Safety notes:
Under no circumstances should a check snoot be installed directly into a pipe, as this may prevent the snoot from opening. Install directly into the appropriate standpipe body only.
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Factory Part Number	CSSTM30F30T-C
Finish	Polished Chrome Plated
Inlet	3" female NST (NH)
Material	Cast Brass
Maximum Operating Pressure	175 PSI at 70°F (21°C)
Outlet	3" male NPT
Weight Lb	8.5000

KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us