# BAYLOC? DRY DISCONNECT COUPLER X FEMALE NPT

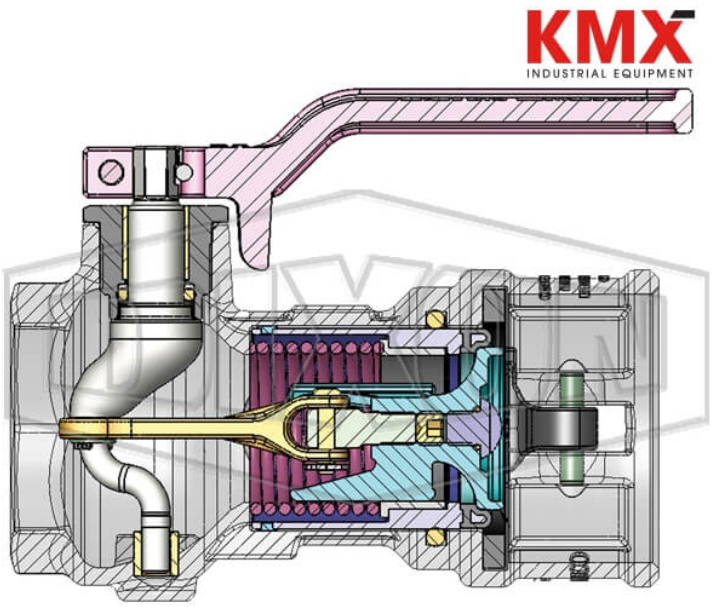


** Referential image*
*** Some features may vary without prior notice. Sale subject to inventory availability*

DATE
: 11/24/2026 01:02 AM

SKU
: 11354

BRAND
: DIXON VALVE

MODEL
: DBC66-300

Applications
Dry disconnects help prevent spillage from normal or accidental disconnects. A spring loaded sealing device is designed to "snap" closed should the valve become disconnected with the poppet open, significantly limiting liquid loss.

Use
Use with DBA style adapters
Use with standard cam and groove dust plug sized one size larger than the dry disconnect size
Use Cam & Groove Dust Plug Size: 2-1/2"

Specifications
Canadian registration number CRN # OH14044 all provinces

Features
Coupler has automatic closing poppet assembly
Heavy duty construction provides long service life
Stainless steel handle allows product exposure to corrosive chemicals or washdown service
Strong handle attachment prevents bending of crank assembly
Large paddle type cam arms are standard on 3" fittings, allow for an easy grip
Optional coupler lock for handle to prevent unintentional opening

Construction
Stainless steel internals
Heavy duty stainless steel handle, crank and link
FFKM gasket, main seal O-ring and handle O-ring, PTFE seals on cylinder assembly, stuffing box and seal under poppet screw

Compatibility & Interchange Data
Compatible with most other brands of cam and groove style dry disconnects



KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

Note

Contact Dixon™ at 800-355-1991 for chemical compatibility, size, material selection and special configurations.

Safety notes

Must be used with a DBA (Dry Break Cam & Groove) Style adapter for coupler to operate. Adapter sold separately.

For pressure ratings at other temperatures, contact Dixon™.

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| **Coupler Size** | 4" |
| **Description** | Cam & Groove Style |
| **Factory Part Number** | DBC66-300 |
| **Female Thread** | NPT |
| **Female Thread Size** | 3" |
| **Material** | Aluminum |
| **Maximum Operating Pressure** | 120 PSI at 70°F(21°C) |
| **Seal** | FFKM & PTFE |
| **Weight Lb** | 0.0100 |



KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU

sales@kmxusa.us

www.kmxusa.us