DQC K-SERIES ISO-A INTERCHANGE FEMALE COUPLER



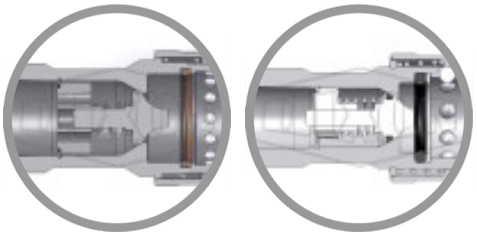

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/23/2026 11:17 PM

SKU
: 22058

MARCA
: DIXON VALVE

MODELO
: 12KF12

Features:
Poppet style shut-off valve

Construction:
Machined components are manufactured using solid bar stock
Stainless steel balls, retaining rings and springs maximize corrosion resistance and extend service life.
Steel componentry is plated using ROHS Compliant Trivalent Chrome.
Steel coupler sleeves are hardened to resist deformation and maximize service life.
Nitrile (Buna-N) seals are standard
Couplers have a PTFE Anti-Extrusion ring.
Valve seals are crimped in place to maintain integrity during excessive flow conditions and pressurized connection.

Available Options:
Contact Dixon for all available option adders
Standard seal options include: FKM, EPDM, FDA FKM, Mil-Nitrile, Fuel Nitrile and Silicone
Kalrez® seal options include: 4079, 6375 and 7075
Valve options include: Unvalved, actuator, steel, brass, 303 stainless steel and 316 stainless steel
Locking sleeve option available
Oxy-Clean treatment is available

Compatibility & Interchange Data:
Interchangeable to ISO7241 Series 'A'
Parker 6600-Series, Aeroquip/Eaton FD56 (5600)
Faster ANV, Hansen HA 15000, Safeway S56-Series

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

ESPECIFICACIONES TÉCNICAS

Body Size	1-1/2"
Burst Pressure	12600 PSI (850 bar)
Factory Part Number	12KF12
Hex	2-3/8"
Length	5.24" (133.0mm)
Material	Steel
Maximum OD	3.33" (84.5mm)
Maximum Operating Pressure	3000 PSI (200 bar)
Temperature Range	-40°F to +250°F (-40°C to +121°C)
Thread	Female NPTF
Thread Size	1-1/2" - 11-1/2
Weight Lb	4.8100

KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU

sales@kmxusa.us

www.kmxusa.us