
DIXON® COMPLETE ASSEMBLY FRAC FITTING

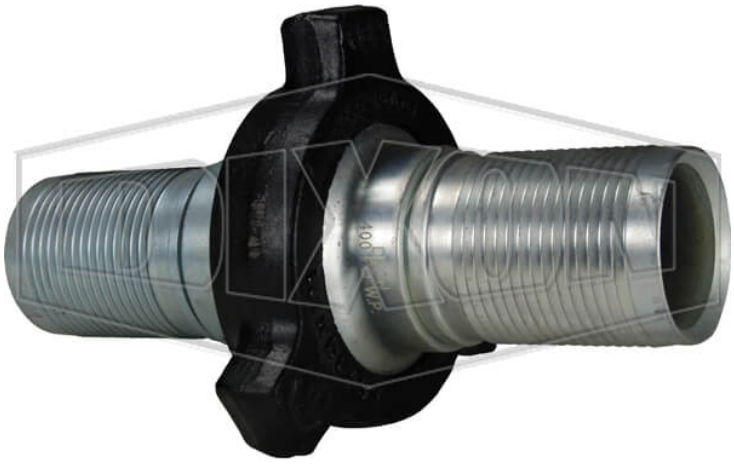

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/23/2026 06:30 PM

SKU
: 15822

MARCA
: DIXON VALVE

MODELO
: HUMF100400CS

Applications:
Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.

Use:
Designed to work with Dixon King Crimp Ferrules.

Features:
One-piece design eliminates leak path experienced with two-piece threaded systems
Long lasting and dependable forged hammer nut
Durable and safe with reliable hose retention when crimped as specified

Construction:
Frac fittings: machined iron to ASTM standards; zinc plated
Nut: forged steel meeting AISI standards
Painted Carbon Steel forged nut
Metal-to-metal sealing surface

Compatibility & Interchange Data:
Interchangeable with current fittings; phase them into your current operation

Note:
Water and petroleum transfer hoses rated from 100 to 300 PSI WP (4:1 SF) have excellent test results with the standard King Crimp ferrules CF400-xxCS)

Safety notes:
400 PSI working pressure with a minimum 4:1 safety factor (hose burst: hose working pressure) is only achieved with: 4" size requires heavy duty (HD) crimp ferrules, CF400-6CSHD through CF400-16CSHD and heavy duty stems
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

ESPECIFICACIONES TÉCNICAS

Description	Male/female complete assembly
Factory Part Number	HUMF100400CS
Mandatory Pkg/Box Qty	1
Material	Iron/Steel
Size	4"
Style	Figure 100
Weight Lb	27.8000
Working Pressure	400 PSI at 70°F (21°C)

KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU

sales@kmxusa.us

www.kmxusa.us