MECHANICAL TEE- SERIES T

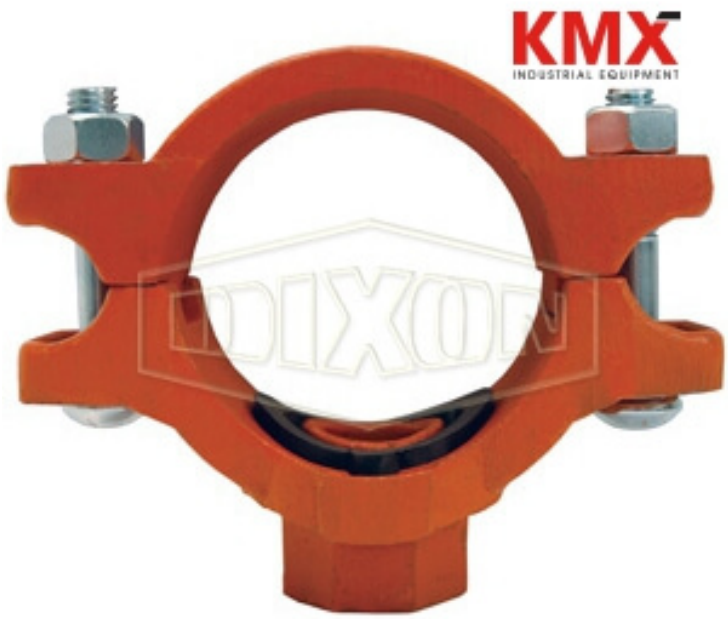

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/23/2026 08:59 PM

SKU
: 24980

MARCA
: DIXON VALVE

MODELO
: MT250125

Specifications:
Underwriters Listed
Factory Mutual approved
Bolts: 2
Bolt Size: 1/2"
Bolt Length: 2-5/8"
Hole saw diameter: 2"

Features:
Provides a fast easy way to install a threaded connection along a length of pipe
Comparable to Victaulic's #920 and Grinnell's #7045
Supplied with EPDM gasket

Construction:
Rust inhibiting paint

Installation
After drilling or cutting a hole in the pipe at the location of the branch connection, simply attach the clamps around the pipe for a leak-free threaded outlet connection.

Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

ESPECIFICACIONES TÉCNICAS

Factory Part Number	MT250125
Material	Ductile Iron
Max. End Load Lbs.	2-1/8"
Maximum Operating Pressure	300 PSI at 70°F (21°C)
Nominal Size	2-1/2"
Size	1-1/4" branch
Weight Lb	3.6500

KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us