
MECHANICAL TEE- SERIES T

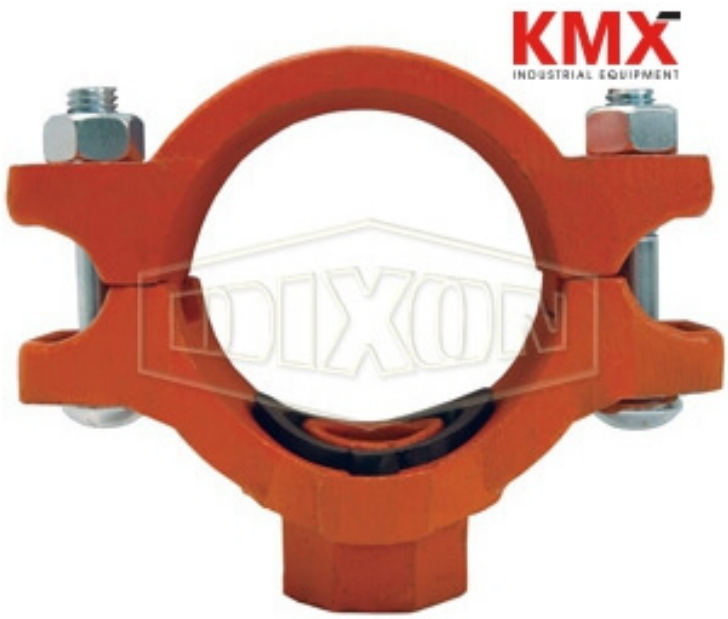

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/23/2026 08:36 PM

SKU
: 24989

MARCA
: DIXON VALVE

MODELO
: MT60125

Specifications:
Underwriters Listed
Factory Mutual approved
Bolts: 2
Bolt Size: 5/8"
Bolt Length: 3-1/4"
Hole saw diameter: 2-1/2"

Features:
Provides a fast easy way to install a threaded connection along a length of pipe
Comparable to Victaulic's #920 and Grinnell's #7045
Supplied with EPDM gasket

Construction:
Rust inhibiting paint

Installation
After drilling or cutting a hole in the pipe at the location of the branch connection, simply attach the clamps around the pipe for a leak-free threaded outlet connection.

Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

ESPECIFICACIONES TÉCNICAS

Factory Part Number	MT60125
Material	Ductile Iron
Max. End Load Lbs.	2-5/8"
Maximum Operating Pressure	300 PSI at 70°F (21°C)
Nominal Size	6"
Size	1-1/4" branch
Weight Lb	8.5500

KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us