DIXON COMPLETE ASSEMBLY FRAC FITTING

FECHA
: 11/23/2026 08:20 PM

SKU
: 27624

MARCA
: DIXON VALVE

MODELO
: RHUMF206400CS

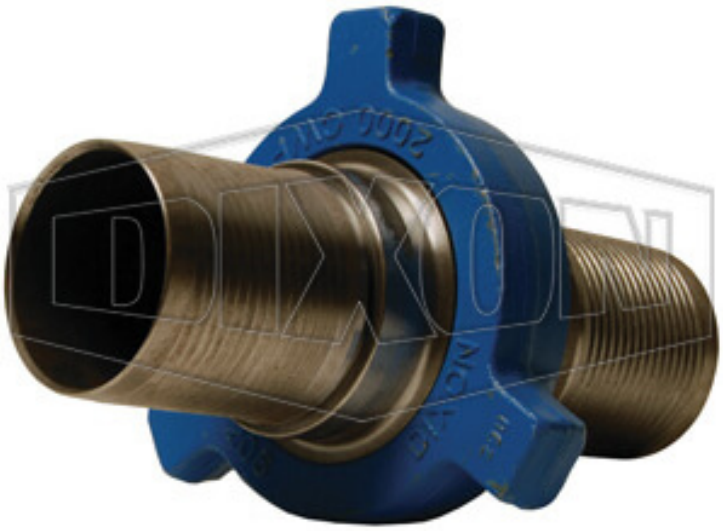

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

Applications:
Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.
Use:
Designed to work with Dixon King Crimp Ferrules.
Specifications:
316 stainless steel stems to ASTM A47 standard
Features:
One-piece design eliminates leak path experienced with two-piece threaded systems
Long lasting and dependable forged hammer nut
Durable and safe with reliable hose retention when crimped as specified
Construction:
Frac fittings: 316 stainless steel to ASTM standards
Nut: Painted Forged Carbon Steel
EPDM Oring (O347EPDM)
Figure 200 has a metal-to-metal sealing surface and Figure 206 is similar to Figure 200 with a secondary seal to supplement the metal-to-metal design.
Compatibility & Interchange Data:
Interchangeable with current fittings; phase them into your current operation
Note:
Water and petroleum transfer hoses rated from 100 to 300 PSI WP (4:1 SF) have excellent test results with the standard King Crimp ferrules CF400-xxSS)
Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov
400 PSI at 70°F (21°C) 4:1 safety factor

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

ESPECIFICACIONES TÉCNICAS

Description	Male/female complete assembly
Mandatory Pkg/Box Qty	1
Material	316 Stainless Steel
Factory Part Number	RHUMF206400CS
Size	4"
Style	Figure 206
Weight Lb	33.4500
Working Pressure	400 PSI at 70°F (21°C)

KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us

www.kmxusa.us