SPLIT FLANGE SWIVEL STYLE 20 150# FLANGE

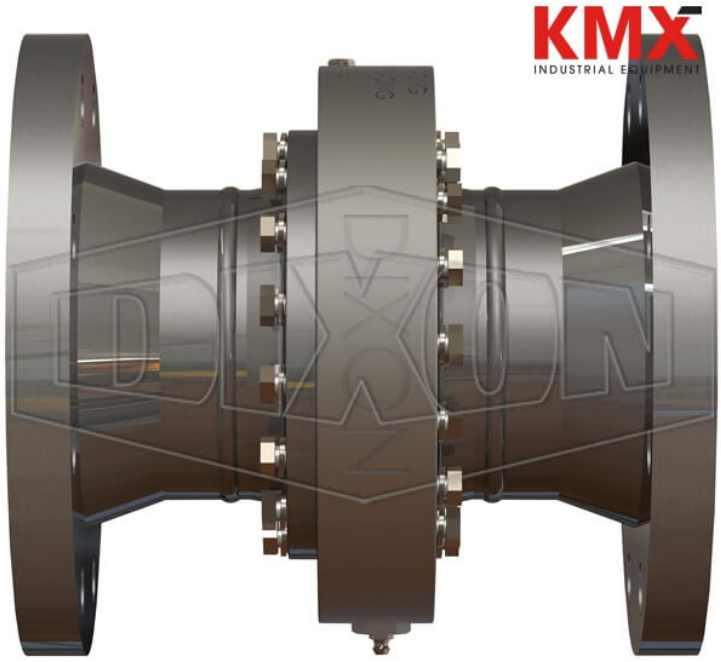

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/24/2026 01:00 AM

SKU
: 19188

MARCA
: DIXON VALVE

MODELO
: SF420FGXFGCS10

Applications:
For use in industries from petroleum, blending plants, petrochemical, refining, mining, distilling, paint plants, farm irrigation and fertilizing, wastewater treatment, food and beverage process equipment, marine and many more

Features:
Bearing pack design allows easy seal change without removing the ball bearings.
Simple maintenance: remove one nose piece, replace seal pack, and reinstall with little down-time.
Instream seal separates the wetted area from the ball bearings allowing for longer bearing pack life over conventional swivels.
Wide set bearing race for higher moment loads
Compact design for low profile applications

Construction:
Bearing pack: through hardened forged high carbon alloy
Material contact surfaces: stainless steel or carbon steel nose pieces

Available Options:
All styles
Stock end configurations: 150 lb. and 300 lb. flanges, FNPT, butt weld, others per request
Stock seals: Baylast™, FKM, PTFE, others per request
Full penetration weld

Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

ESPECIFICACIONES TÉCNICAS

Factory Part Number	SF420FGXFGCS10
Material	Carbon Steel
Pressure Rating	up to 600 PSI
Seal	FKM
Size	4"
Temperature Range	-40°F to 450°F (-40°C to 232°C)
Weight Lb	55.0000

KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us

www.kmxusa.us